VOL.6

CCTV One

One Stop Shop for CCTV Equipments and Solutions

WWW.CCTVONE.COM

SHOP AT EBIZ STORE
ENEWS PROMOTION
DEALER PRICING AVAILABLE
OEM/ODM WELCOME

2012

SECURITY PRODUCT CATALOGUE

1-866-58-CCTV1 (1-866-582-2881)

One Stop Shop for CCTV Equipments and Solutions

Located in Los Angeles, California, CCTVOne is a manufacture and distributor of CCTV surveillance products & solutions since 2002. We carry the most complete product lines offering the latest technical developments in the industry. Majority of our products are assembled in the U.S.A, thus carrying the guarantee and reputation of our company and providing better opportunities to installers. That is why our products are not always the lowest price, but also the best quality you can get in the market. The company's long term commitment to excellence has earned us an outstanding reputation following in and out of the region. With many dealer programs available to serve our customers with ease and comfort, CCTVOne have been the number one choice for many CCTV installers and wholesalers around the world.

OFFICE HOURS:

Monday – Friday 8:30AM – 5:30PM (PST)
Saturday, Sunday – by Appointment Only (Local Customers)

CONTACT INFO:

Telephone: 1-323-721-8999
Faximile: 1-323-721-8599
Toll Free: 1-866-58-CCTV1 (1-866-582-2881)
General Contact: Info@cctvone.com
Sales Dept: Sales@cctvone.com
RMA/Technical Support: Support@cctvone.com

ORDERS:

Customers may place orders online, by phone, fax or e-mail. Once the order is placed, customer is bound to CCTVOne's terms & conditions. Please ask our account representative for more details.

DEALER PRICING:

We offer wholesale prices to business customers such as security/computer/network products retail store, online store, system integrator, security system installers, VAR, and OEM distributors. To receive dealer pricing, please complete the new account applications, also provide us valid proof of business documentation include but not limited to reseller certificate, federal tax ID, or tax exemption forms.

METHODS OF PAYMENT:

We accept check or money order, credit card or debit card. C.O.D. company check will be accepted upon the approval by our credit dept. Net-Term is available to qualified customers. Please ask for details.

TABLE OF CONTENTS

Hidden DVR & Spy Camera Combo 1
Standard and Pro Series Standalone DVR 2
Advanced and Premium Series Standalone DVR 3
Hybrid Standalone Network DVR 4
Hybrid PC Based NVR Board & NVR System 5
Mega-Pixel IP Camera 6
Security Camera Selection Guide 7
Indoor Dome Camera Series 8
Outdoor Vandal Dome Camera Series 9
Outdoor (Long Range) IR Camera Series 10
High Speed PTZ Camera and Controllers 11
Covert / Spy Camera 12
Mini / Bullet Camera 13
Professional Camera / Zoom Camera 13
CCTV Lens 14
Connectors 16
Outdoor Housing & Bracket 17
Camera Bracket 18
Dummy Cameras 18
Power Transformers 19
Power Supply Box 19
Power Solution 20
CCTV Bulk Cables, Pre-made Cables 21
Video Balun / Transceivers 22
Video Processors and HDMI Processors 23
CCTV Testers 24
Installation Tools 24
Surveillance Sign 24
Audio Cable 25
Wireless TX/RX Devices 25
Infrared Illuminators 25
DVR Lockbox 25
Universal LCD Bracket 26
Surveillance DIY Packages 27

PRODUCT WARRANTY:

All products sold by CCTVOne carry a standard one (1) year manufacturer warranty, unless noted otherwise.

CCTVONE OFFERS YOU -

Price "Beat and Meet" Policy
Wide Range Product Selections
Advance & Reliable Products
Fast & Friendly Customer Services
Great Technical Support

© eSecure, Inc. All Rights Reserved. All other trademarks are property of their respective owners.

SPY CAMERA AND HIDDEN DVR COMBO

POWER BOX HIDDEN DVR

04PB04 — 4CH Power Box DVR

04PB08 — 8CH Power Box DVR

Hiding H.264 DVR Inside a Cable Management Wall Mount Compact Chassis

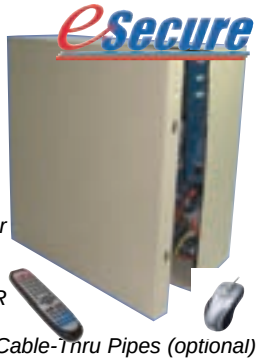

Power Supply Box:
- Secured Wall Mounted H.264 DVR within a Power Distribution Box
- Easily Mounts in Equipment Closets or Electronic Rooms
- No accessible User Controls
- Built-in Power Supply provide powers to DVR and all Cameras
- Connect Audio, Video, Network Signals via Cable-Thru Pipes (optional) including up to 4 or 8 Camera Signal Inputs

Hidden DVR:
- Pentaplex operation enabling simultaneous live view or playback while continuing to record, network transfer and backup
- H.264 high quality compression saves HDD space
- Remote monitoring, recording, playback, change system settings via Ethernet and/or Internet
- Free DDNS server for use with dynamic IP address
- EZ Record, Copy & Setup
- Backup/Easy software upgrade via USB Flash Drive
- IR Remote control included
- Easy install Hard Drive and/or Power Distribution Supply with Slide Out Tray
- Remote Viewing via 3G/4G Network on Smartphones

INTERCOM HIDDEN DVR

A0907C — Video Intercom System Outdoor Day/Night Camera

A0907M — Video Intercom System 7" TFT Color High Definition Monitor

NEW

Intercom:
Single Video Entry Mode: 1 door camera and 1 indoor monitor
Dual Video Entry Mode: require at least 2 outdoor camera and 1 indoor monitor
Call transfer to other extension: require at least 2 indoor units
Internal communication among indoor units: at least 2 indoor units
Max System Configuration: 4 Rooms Station, 2 Door Station

Hidden DVR:
The indoor monitor is capable of video record, photo capture, video playback, photo browse, music play. All media files (video, photo, music) will be recorded onto internal flash memory or external SD Card. Also comes with a USB cable to allow media files (in internal storage) to be played back on PC.

17J51C

Spy Key Fob DVR

World's first mini camera with high definition photo and video / audio recording function

Max Resolution: 1280 x 960
Video Capture Resolution: 640x480
Power Battery: 280mha 3.7V
Recording Time: AVI: 1.5 Hours, Pictures: 2200 pics
Storage Capacity: MicroSD, Support up 16GB
Charging Time: 2 Hours

17J50C

Spy Pen DVR

Fully Functional Ball Point Pen
Real time audio/video recording in AVI format
Built-in rechargeable battery
Playback video on PC
Camera Technical Parameter
Video compression: AVI video format, 640X480 resolution ; 12 Frames per second
Still Picture: 640 x 480 resolution
Internal memory: 4GB
Video file size > 500KB per min
Recording mode: continuous recording until memory is full or manually off
Adaptor type: USB adaptor charging cable
Battery type: Lithium-ion
Record time: up to 3h
Battery use time: approximately 2-3 hours

17J54C

Spy Alarm Clock DVR, 2.0 Megapixel

Covert Camera & DVR in a desktop alarm clock. Remote control, motion detection video upto 12 hours

- Remote Control
- Video Recording time over 12 Hours
- Sound Recording Time over 25 Hours
- Taking photo
- Motion detection video
- Web cam
- Support TF Card upto 32GB
- Digital Clock

17J55C

Security AM/FM Radio Clock DVR, w/Projection Display, Motion Detection

Covert Camera & DVR in a desktop alarm clock. Remote control, motion detection video upto 12 hours

- Remote Control
- Video Recording time over 12 Hours
- Sound Recording Time over 25 Hours
- Taking photo
- Motion detection video
- Web cam
- Support TF Card upto 32GB
- Digital Clock

Top View

STANDARD AND PRO SERIES H.264 STANDALONE DVR

Standard H.264 DVR

ES00M140 4CH

Rear View

ES00M180 8CH

Rear View

Professional H.264 DVR with CMS

007754 4CH

007758 8CH

ES00A260 16CH

Professional H.264 DVR with CMS and DVD Backup

007728D 8CH

007726D 16CH

Smartphone Support

Dynamic DNS

Comparison Chart

	Standard H.264 DVR		Professional H.264 DVR with CMS			Professional H.264 DVR with CMS and DVD Backup	
	ES00M140	ES00M180	007754	007758	ES00A260	007728D	007726D
Video Input	4CH	8CH	4CH	8CH	16CH	8CH	16CH
Video Output	1 VGA(Max 1280x1024); 1 BNC		1 VGA(Max 1280x1024); 1 BNC			1 VGA(Max 1280x1024); 1 BNC	
CIF Recording	D1 @ 30 fps / CH	CIF @ 30 fps / CH	CIF @ 30 fps / CH			CIF @ 30 fps / CH	CIF @ 30 fps / CH
D1 Recording		D1 @ 7.5 fps / CH	D1 @ 7.5 fps / CH			D1 @ 30 fps / CH	D1 @ 7.5 fps / CH
Audio In/Out	1CH / 1 CH		4CH / 1 CH	8CH/1CH	16CH/1CH	8CH/1CH	16CH/1CH
Alarm In/Out	N/A		4CH / 1 CH	8CH/1CH	16CH/1CH	8CH/1CH	16CH/1CH
Playback Channel	4CH	8CH	4	8	16	8	16
Storage	1 SATA HDD, up to 2TB		1 SATA HDD, up to 2TB		2 SATA HDDs up to 4 TB	2 SATA HDDs up to 4 TB or 1 SATA HDD + 1 DVD RW	
PTZ	N/A		1 RS485			1 RS485	
Backup	USB or Network		USB or Network			USB or Network, DVD(Optional)	
CMS Client Software	Optional		YES			YES	
Remote Browser	IE (windows XP/2000/vista/7)		IE (windows XP/2000/vista/7)			IE (windows XP/2000/vista/7)	

* All DVRs comes with USB Mouse and IR Remote Control, and they all work with Smartphone on 3G/4G Network

ADVANCED AND PREMIUM SERIES H.264 STANDALONE DVR

Advanced H.264 DVR with HDMI 1080p

00H04C 4CH | **00H08C** 8CH | **00H16C** 16CH

Rear View

Advanced H.264 DVR with HDMI 1080p and Jog Shuttle

00MD08 8CH | **00MD16** 16CH | **00MD32** 32CH

NEW

Rear View

Premium H.264 DVR with D1 Real Time Recording

00FD08 8CH | **00FD16** 16CH

NEW

Comparison Chart

Smartphone Support | Dynamic DNS

	Advance H.264 DVR with HDMI			Advance H.264 DVR with HDMI and Jog Shuttle			Premium H.264 DVR with D1	
	00H04C	00H08C	00H16C	00MD08	00MD16	00MD32	00FD08	00FD16
Video Input	4CH	8CH	16CH	8CH	16CH	32CH	8CH	16CH
Video Output	1 VGA(Max 1280x1024); 1 BNC; 1 Spot; 1 HDMI (1920x1080)			1 VGA(Max 1280x1024); 1 BNC; 1 Spot; 1 HDMI (1920x1080); 1 Loop-Out			1 VGA(Max 1280x1024); 1 BNC; 1 Spot; 1 HDMI	
CIF Record	CIF @ 30 fps / CH			CIF @ 30 fps / CH		4CH D1, 28CH CIF real time	D1 @ 30 fps / CH	
D1 Record	D1 @ 7.5 fps / CH			D1 @ 7.5 fps / CH				
Audio In/Out	4CH /1CH	4CH / 1 CH	4CH / 1 CH	8CH / 1 CH	16CH / 1 CH	16CH / 1 CH	8CH / 1 CH	16CH / 1 CH
Alarm In/Out	4CH /1CH	8CH / 1 CH	16CH / 1 CH	8CH / 4 CH	16CH / 4 CH	16CH / 4 CH	8CH / 4 CH	16CH / 4 CH
Playback Channel	4CH	8CH	16CH	8CH	16CH	16CH	8CH	16CH
Storage	2x SATA HDDs			4 x SATA HDD (or 3x SATA HDD plus 1xDVD-RW)		8x SATA HDD (or 4x SATA HDD + 1xDVD-RW)	8 SATA HDDs up to 16 TB or 4 SATA HDDs +1 DVD-RW	
PTZ	1 RS485			1 RS485			1 RS485	
Backup	x1 USB 2.0 ports, Support Thumb Drive, External USB CD-RW or DVD+RW			x1 USB 2.0 ports, Support Thumb Drive, Optional Internal DVD Burner			x1 USB 2.0 ports, Support Thumb Drive,	
CMS Client Software	YES			YES			YES	
Remote Browser	IE (windows XP/2000/vista/7) , Safari(Mac OS)			IE (windows XP/2000/vista/7) , Safari(Mac OS)			IE (windows XP/2000/vista/7) , Safari(Mac OS)	

* All DVRs comes with USB Mouse and IR Remote Control, and they all work with Smartphone on 3G/4G Network

HYBRID H.264 NETWORK DVR

Hybrid H.264 NVR with 2 IP Channels

01204D 4CH | **01208D** 8CH | **01216D** 16CH



Rear Panel

- LAN 10/100/1000 Mbps (RJ-45)
- USB 2.0 Ports
- NTSC / PAL Switch
- Audio Input (D-SUB)
- Alarm I/O & RS-485 (D-SUB)
- Main Monitor Output (VGA1)
- Main Monitor Output (VGA2)
- Call Video Output
- Main Audio Output
- Digital Display Output
- Video Input
- Power Jack

Hybrid H.264 NVR with 8 IP Channels

01804S/T 4CH | **01808S/V** 8CH | **01816S/T/U** 16CH

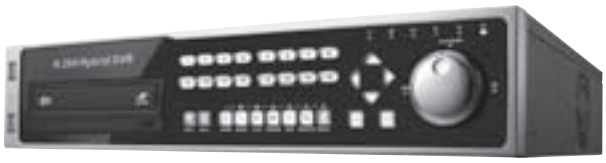

Rear View

SONY AXIS eSecure ACTi VIVOTEK SANYO

Comparison Chart

	Hybrid NVR with 2 IP Camera Support			Hybrid NVR with 8 IP Camera Support			Hybrid NVR with 8 IP Camera Support		
	01204D	01208D	01216D	01804S	01808S	01816S	01804T	01808V	01816U
Video Input	4CH	8CH	16CH	4CH	8CH	16CH	4CH	8CH	16CH
Video Output	1 VGA(Max 1280x1024); 1 BNC; 1 Spot; 1 HDMI (1080p pixels), Loop-Out			1 VGA(Max 1280x1024); 1 BNC; 1 Spot; 1 HDMI (1080p), Loop-Out			1 VGA(Max 1280x1024); 1 BNC; 1 Spot; 1 HDMI (1080p), Loop-Out		
Recording	CIF @ Real Time 30fps/CH			CIF @ Real Time 30fps/CH			D1 @ Real Time 30fps / CH		
Input IP Devices	Up to 2CH			Up to 8CH			Up to 8CH		
Max Cameras	6CH	10CH	18CH	12CH	16CH	24CH	12CH	16CH	24CH
Audio In/Out	4CH / 1 CH	8CH / 1 CH	16CH / 1 CH	4CH / 1 CH	8CH / 1 CH	16CH / 1 CH	4CH / 1 CH	8CH / 1 CH	16CH / 1 CH
Alarm In/Out	4CH / 2 CH	8CH /2 CH	16CH / 3 CH	4CH / 2 CH	8CH /2 CH	16CH / 3 CH	4CH / 2 CH	8CH /2 CH	16CH / 3 CH
Playback Channel	4CH	8CH	16CH	4CH	8CH	16CH	4CH	8CH	16CH
Storage	4x SATA for HDD and DVD+RW			4x SATA for HDD and DVD+RW			4x SATA for HDD and DVD+RW		
PTZ	1 RS485			1 RS485			1 RS485		
POS Device	1x RS232C			1x RS232C			1x RS232C		
Backup	x1 USB 2.0 ports, Support Thumb Drive, DVD-RW			x1 USB 2.0 ports, Support Thumb Drive, DVD-RW			x1 USB 2.0 ports, Support Thumb Drive, DVD-RW		
CMS Client Software	YES			YES			YES		
Remote Browser	IE (windows XP/2000/vista/7) , Safari(Mac OS)			IE (windows XP/2000/vista/7) , Safari(Mac OS)			IE (windows XP/2000/vista/7) , Safari(Mac OS)		

* All DVRs comes with USB Mouse and IR Remote Control, and they all work with Smartphone on 3G/4G Network

PC-BASED HYBRID NVR BOARD & NVR SYSTEM

- Version 12.12 Supports H.264 Hardware Compression **PCI-Express** Card 4/8/16/32CH
- Display/ Recording up to 704x480 Full D1 Resolution
- Fully compatible with Windows 7 (32 bit editions only)
- Support Remote Monitoring from iPhone and Blackberry
- Support Remote Monitoring from Safari (Mac), Chrome (Google), Opera and Fire Fox Web Browser
- Support Megapixel Camera (Arecont Vision and Axis Megapixel)
- Support Axis, ACTi, Pixord, Cynix, Cellinix Network IP Camera
- Integrated POS with "Text Display" option in Display Setup
- TV Matrix up to 4 TV output (option)

Windows Based DVR System

CCTVONE custom build DVR system based on your need. We assemble, install, burn-in test each DVR and carefully package each unit. We deliver every single DVR with rock solid stability and reliability.

Package includes: Intel CPU, Intel Chipset Motherboard, Memory 1G or more. HDD 500G or more, DVD-RW, Windows 7 License & CD, Keyboard, Mouse, Application Program Preinstalled with 24 Hr Burin-in Test. Rackmount Chassis and LCD Monitor options available.

Option 1	4ch, 30fps
Option 2	16ch, 120fps
Option 3	16ch, 480fps, H.264
Option 4	32ch, 240fps
Option 5	32ch, 960fps, H.264

09D070
Replacement Pigtail Cable
8 port or 16 port

09D110
TV Out Matrix (Up to 4 TVs)
Master & Slave Card

NEW

0703004S
4 CH, 30FPS Display, 30 FPS Recording,
Optional Sensor / Relay and PTZ Board

07120H04
4 CH, H.264, Realtime Display & Recording, 4CH Audio, PTZ, Alarm
Hardware H.264 Compression

07120A08
8 CH, 120FPS Display, 120FPS Recording,
Optional Sensor / Relay and PTZ Board

07240H08
8 CH, H.264 Real Time Display & Recording, 8CH Audio, Stackable to 16CH, 480FPS, PTZ, Alarm
Hardware H.264 Compression

07120A16
16CH, 120FPS Display, 120FPS Recording,
Optional Sensor / Relay and PTZ Board

07480H16
16 CH, H.264 Real Time Display & Recording, 16CH Audio, Stackable to 32CH, 960FPS, PTZ, Alarm
Hardware H.264 Compression

07240N32
32CH, 240FPS Display/ Recording,
Sensor / Relay and PTZ Board Included

07960H32
32 CH, H.264 Real Time Display & Recording, 16CH Audio, PTZ, Alarm
Hardware H.264 Compression

MEGA-PIXEL IP CAMERA

Common Features:

- 1/2.7" Progressive Scan CMOS Sensor
- H.264 and MJPEG compression
- Effective Pixcel 1920(H) x 1080(V)
- Full HD 1080p / HD 720p real-time at dual streaming H.264 Compression.
- Motion Detection
- Privacy masks
- Two Way Audio (option)
- Day/Night IR Cut (option)
- MicroSDHC Support up to 32GB
- POE Built-in
- BNC Analog Output (option)
- Weatherproof IP66
- Upto 20 User Accounts
- ONVIF* support

ONVIF
Driving network video through global standardization

Series A IP Camera Features:

- Video Streaming:
  - Simultaneous H.264 1080p (13/15 fps) + MJPEG 720p (25/30 fps)
  - Simultaneous H.264 1080p (13/15 fps) + H.264 720p (25/30 fps)
- Resolution:
  - H.264: Full HD 1080p/SXGA/HD 720p/XGA/SVGA/D1/VGA/CIF
  - MJPEG: Full HD 1080p/SXGA/HD 720p/XGA/SVGA/D1/VGA/CIF

Series B IP Camera Features:

- Video Streaming:
  - Simultaneous H.264 1080p (25/30 fps) + MJPEG D1 (25/30 fps)
  - Simultaneous H.264 1080p (25/30 fps) + H.264 D1 (25/30 fps)
- Resolution:
  - H.264: Full HD 1080p/SXGA/HD 720p/XGA/SVGA/D1/VGA/CIF
  - MJPEG: Full HD 1080p/SXGA/HD 720p/XGA/SVGA/D1/VGA/CIF

Series C IP Camera Features:

- Video Streaming:
  - Single Stream: 2592X1944 (10 fps)
  - Single Stream: 2048X1536 (20 fps)
  - Simultaneous H.264 1080p (25/30 fps) + MJPEG D1 (25/30 fps)
  - Simultaneous H.264 1080p (25/30 fps) + H.264 D1 (25/30 fps)
- Resolution:
  - H.264: Full HD 1080p/SXGA/HD 720p/XGA/SVGA/D1/VGA/CIF
  - MJPEG: 5M(2592x1944)/3M(2048x1536)/Full HD 1080p/SXGA/HD 720p/XGA/SVGA/D1/VGA/CIF

NW602C

5M Progressive Scan CMOS, 2592(H) x 1944(V), C/CS Mount, WDR, D/N, Color 0.2 lux B/W 0.02 lux, DC12V/PoE

5.0 Mega Pixel

NW102A NW102B

Mini Pancake Dome, Indoor, Fixed Lens, WDR, D/N, Color 0.1 lux @ F1.5, POE

NW602A NW602B

Box Type, Indoor, C/CS Mount, WDR, D/N, Color 0.2 lux B/W 0.02 lux, DC12V/PoE

NW222A NW222B

Outdoor Vandal IR Dome, Vari-Focal 3~9mm, WDR, D/N, Color 0.2 lux B/W 0.02 lux, 24 LED, IR Distance upto 80FT, 2-Way Audio, Alarm In, Relay Out, Analog Video-Out, DC12V/AC24V/PoE

NW502A NW502B

Outdoor IR Bullet, Vari-Focal 3~9mm, WDR, D/N, Color 0.2 lux B/W 0.02 lux, 23 LED, IR Distance upto 80FT, 2-Way Audio, Alarm In, Relay Out, Analog Video-Out, DC12V/AC24V/PoE

NW222A NW222B

Full HD Indoor PTZ Dome Camera 18x Optical (4.7~84.6mm), 8x Digital

Full HD Outdoor PTZ Dome Camera 20x Optical (4.7~94mm), 8x Digital

1/2.8" Sony Progressive CMOS, Max. 1080P + D1 @ 30fps, H.264, D/N, IR Cut Filter, 2-Way Audio, Alarm 4-In 2-Out, microSDHC 32GB support, High Power POE, AC24V

* ONVIF (Open Network Video Interface Forum) is a global and open industry forum with the goal to facilitate the development and use of a global open standard for the interface of physical IP-based security products. Or in other words, to create a standard for how IP products within video surveillance and other physical security areas can communicate with each other.

SECURITY CAMERA SELECTION GUIDE

We changed the way to display our camera products in this catalog. Choosing the right camera to best fit a particular situation depends on your needs. Before deciding which cameras to purchase for your money, there are some important things you need to know.

1. Will the camera be used in an indoor or outdoor setting? If you need an outdoor camera, look into the camera specs to see if it is weatherproof or not. This is really important. Normally the outdoor cameras can also be used for indoor application.

2. How is the lighting thru-out the entire day? Some cameras have infra-red or IR for short capabilities, the small built-in IR leds help illuminate the camera's view but has no effect to the human eye, this is the same type of technology used in night vision goggles. However, some cameras we have new technologies that can see at night without using infra-red, it's done by digital signal processor (DSP). When you select the night vision camera, please check the lux level of the DSP, the lower the lux, the more the camera can see at night without infra-red.

3. What video quality is desired? Each camera specification will show the level of video quality represented by the TVL number. TVL which stands for TV Lines, is a measurement of cameras horizontal resolution. As a reference, cameras with 420-480TVL: mid resolution, 540-600TVL: high resolution; 700TVL: super hi-resolution. (see below specification about Video Quality)
CCD vs. CMOS: What's the Difference?
- CMOS cameras are more economical, providing a good image quality with a modest color distortion
- CCD cameras provide a sharper image quality and a more precise color match
- Night vision is more notable with CCD cameras, compared to CMOS cameras
- It is significant to produce more accurate images when IR Cut filter is built into CMOS cameras at night time

4. Which lens should I use? How far you need to see will determine what security camera lens you should use to best fit your application. A 4mm lens will give about a 70 degree angle of view with 35 feet of facial detail. This works great for residential or small office security camera applications. Keep in mind that the further you want to see will narrow the field of view of your picture. See catalog page 14 to lookup the lens field of view table.

5. Which power source is needed? Not all security cameras have the same power requirements. Some security cameras require 12VDC power while some require 24VAC power. But most importantly security cameras need a certain amount amperages or watts to perform at their best. 24VAC system is more professional because it can carry power over long cable runs with very little power loss. However, within reasonable distance, 12VDC Systems are more popular due to it's simplicity of installation.

Video Quality

CMOS420 — **Color 1/4" CMOS Sensor, 420TVL, 2Lux / F1.2, Auto BLC, AWB, Power Consumption 120mA**

SONY540 — **Color Day, BW Night, 1/3" Sony SuperHAD II CCD, Sony DSP, 540TVL, 0.001Lux / F1.2,(Day), Auto BLC, AWB, Power Consumption 150mA**

SONY600 — **Color Day, BW Night, 1/3" Sony SuperHAD II CCD, Sony DSP, 600TVL, 0.001Lux / F1.2,(Day), Auto BLC, AWB, Power Consumption 150mA**

CMOS700 — **Low cost and low power consumption. Color 1/3" CMOS Sensor, 700TVL, True Day/Night with IR Cut Filter built-in, Auto BLC, AWB, No color rolling, Power Consumption 120mA**

SONY700 —
Color Day, BW Night, 1/3" Sony SuperHAD II CCD, Sony Effio-E DSP, 700TVL, 0.01 Lux(Day mode), 0.003 Lux (Night mode), Optional OSD Cable (which will control WDR, DNR, DN, OSD menu, DSS, Flickerless, Motion Detection, WB, GC, BLC, Digital Zoom, Camera ID, Camera Title, Mirror, Freeze functions), Power Consumption 250mA

WDR700 — **Wide Dynamic Range Camera can deliver clear and high quality pictures in the backlight. The WDR technology results increasing exposure in dark areas while decreasing it in bright areas, thus produces a corrected image with clear details.**

- Powerful WDR (Wide Dynamic Range) Performance for extreme light condition
- True Day/Night with ICR Mechanism
- 1/3" Sony Double Density CCD
- Sony Effio Chipset with 700TVL Resolution
- Built-in DC Motor Driver to support Auto-Iris DC Lens.
- Low Light Sensitivity up to 0.008 (0.05) Lux (Sens-up Off)
- OSD Menu on Cable
- Auto Senses Light Contract to turn WDR On or Off
- Digital Noise Reduction (DNR) Function
- Digital Image Stabilizer (DIS) Function
- 8 Privacy Zones for Motion Detection, generates signals for Alarm Output
- Easy Accessed OSD Menu (support 8 languages)
- Additional Functions: Sync (INT/LL), Sens-up(x512), Freeze, Flip (H/ V-REV), DZOOM, Shaprness, Privacy functions
- 12VDC or Dual Voltage (AC24V/DC12V)

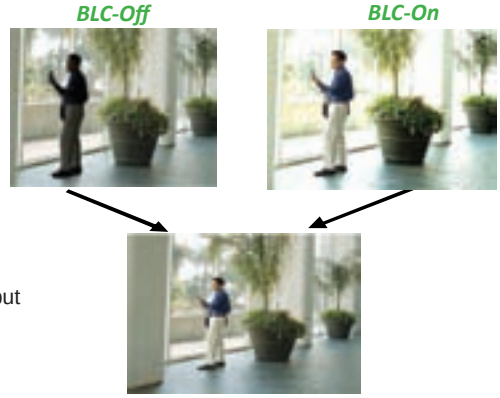

With 512X WDR Range, Backlight No Problem

INDOOR DOME CAMERA SERIES

Camera Housing - Indoor Dome Type

C1 3" Mini White Dome

C2 4" Black or White Dome

C3 3.5" White Dome

C4 4" Mirrored Cover Dome Black or White

C5 4.5" Black Dome

C6 3.5" Eyeball 12 IR LED Dome, White, 3-Axis

C7 4" Dome with Wall Mount, Ivory or Black

C8 3" Corner Mount Dome, Metal

- Perfect for Small Rooms and Elevators Requiring Camera with Wide Angle Vie

C9 5" White Dome, 3-Axis

C10 5" White Dome, 3-Axis, 36 LED

C9 C10 3-Axis Rotating Mechanism

3-Axis Gimbal Bracket

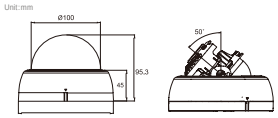

Install at anywhere any angle you want.

Indoor Dome Camera Item# Look Up Table

ITEM#	C1 L1	C2 L1	C3 L1	C4 L1	C5 L2	C6 L1 LED12	C7 L1	C8 L1	C9 L2	C10 L2 LED36
CMOS420	23152C	23151C	23143C	new	---	161220	new	new	new	new
SONY540	new	23C43C	---	17623C	23C71C	new	23C62C	23C64C	236710	166710
SONY600	new	23C55C	---	17624C	23C74C	new	new	new	236740	166740
CMOS700	new	233700	new	new	new	new	new	new	new	new
SONY700	23C900-W	23C900	new	17623E	23C940	new	new	new	236940	new
WDR700	new	new	new	new	new	new	new	new	236830	166830

Note: All new items are avaiable upon request. 24VAC Cameras are also available upon request.

Camera Viewing Angle

L1 Lens Options: Wide Angle 2.5mm, **3.6mm (default),** 6mm, 8mm, 12mm, 16mm, Long Range 25mm Lens

L2 Lens Options: **Manual Iris Vari-Focal (MVF) 4~9mm (default),** MVF 2.8-12mm, Auto-Iris Vari-Focal (AVF) 4~9mm, AVF 9-22mm, AVF 5-50mm, IR Lens AVF 2.5-10mm

Nightvision Distance (IR ON)

LED12 12 pc of Infra-red 850nm ø5 led, effective IR range up to 30FT

LED36 36 pc of Infra-red 850nm ø5 led, effective IR range up to 90FT

OUTDOOR VANDAL DOME CAMERA SERIES

Camera Housing - Outdoor Dome Type

C11 3.5" White or Gray Metal Dome, 26 LED

C12 4" White or Black Metal Dome. 36 IR Led

External Zoom and Focus Adjustment

C13 5" White Vandal Metal Dome, 3-Axis

C14 5" White Vandal Dome, 3-Axis, 36 LED

3-Axis Gimbal Bracket



C13 C14 3-Axis Rotating Mechanism

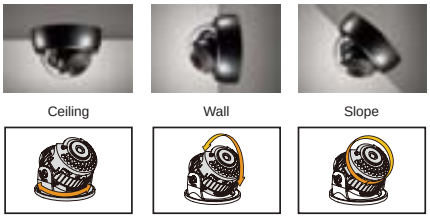

Install at anywhere any angle you want.

C15 4.5" Beige Vandal Dome

C16 4.5" Beige Vandal Dome, 12 LED

Heavy Duty Beige Metal Case With Tinted Cover

C17 4.5" Beige Dome, L Bracket

C18 4.5" Beige Dome, 12 LED, L Bracket

Heavy Duty L Type Wall Mount Metal Case, Beige

Outdoor Dome Camera Item# Lookup Table

ITEM#	L1 C11 LED26	C12 L2 LED36	C13 L2	C14 L2 LED36	C15 L1	C16 L1 LED12	C17 L1	C18 L1 LED12
CMOS420	181240	---	---	---	new	181120	new	new
SONY540	18C240	18C340	248710	188710	24B43C	18B140	24B43W	18B14W
SONY600	18C250	18C350	248740	188740	24B55C	18B160	24B55W	18B16W
CMOS700	183270	183370	new	new	new	new	new	new
SONY700	18C290	new	new	new	new	new	new	new
WDR700	new	new	248830	188830	new	new	new	new

Note: All new items are avaiable upon request. 24VAC Cameras are also available upon request.

Camera Viewing Angle

L1 Lens Options: Wide Angle 2.5mm, **3.6mm (default),** 6mm, 8mm, 12mm, 16mm, Long Range 25mm Lens

L2 Lens Options: **Manual Iris Vari-Focal (MVF) 4~9mm (default),** MVF 2.8-12mm, Auto-Iris Vari-Focal (AVF) 4~9mm, AVF 9-22mm, AVF 5-50mm, IR Lens AVF 2.5-10mm

Nightvision Distance (IR ON)

LED12 12 pc of Infra-red 850nm ø5 led, effective IR range up to 30FT

LED26 26 pc of Infra-red 850nm ø5 led, effective IR range up to 60FT

LED36 36 pc of Infra-red 850nm ø5 led, effective IR range up to 90FT

OUTDOOR (LONG RANGE) IR CAMERA

C20 2"D Metal White, 12 IR bullet

C21 2"D Metal White, 26 IR bullet

C22 3"D Metal White, 36 IR bullet

C23 3"D Metal Black 42 IR Bullet

External Zoom and Focus Control

C24 Mini Outdoor Long Range 36 IR Camera

Metal Housing Bracket Item# 675030 Included

C25 Outdoor Long Range 36 IR Camera

Optional J Bracket Item# 675040

Optional Metal Housing Bracket Item# 675000

C26 Outdoor Long Range 30 IR Camera

External Zoom and Focus Control Knob

Cable Thru Bracket

Indoor/Outdoor IR Bullet Camera Item# Lookup Table

ITEM#	C20 L1 LED12	C21 L1 LED26	C22 L1 LED36	C23 L2 LED42	C24 L1 LED36	C24 L2 LED36	C25 L1 LED36	C25 L2 LED36	C26 L3 LED30Mix
CMOS480	151120	151260	--	--	--	--	--	--	--
SHARP470	new	15C260-3	--	--	147200-2	new	new	new	--
SONY540	15C12C	15C26C	15C34C	15C450	147200	147220	14761C	14767C	14935C
SONY600	-	15C28C	15C36C	15C460	147202	147222	14762C	14768C	14945C
CMOS700	-	new	153360	--	new	new	new	new	--
SONY700	-	---	15C39C	--	new	147290	new	new	--
WDR700	-	---	new	--	new	new	new	new	--

Note: All new items are avaiable upon request. 24VAC Cameras are also available upon request.

Camera Viewing Angle

L1 Lens Options: Wide Angle 2.5mm, **3.6mm (default),** 6mm, 8mm, 12mm, 16mm, Long Range 25mm Lens

L2 Lens Options: **Manual Iris Vari-Focal (MVF) 4~9mm (default),** MVF 2.8-12mm, Auto-Iris Vari-Focal (AVF) 4~9mm, AVF 9-22mm, AVF 5-50mm, IR Lens AVF 2.5-10mm

L3 Lens Options: **Manual Iris Vari-Focal (MVF) 5~50mm**

Nightvision Distance (IR ON)

LED12 12 pc of Infra-red 850nm ø5 led, effective IR range up to 30FT

LED26 26 pc of Infra-red 850nm ø5 led, effective IR range up to 60FT

LED36 36 pc of Infra-red 850nm ø5 led, effective IR range up to 90FT

LED42 42 pc of Infra-red 850nm ø5 led, effective IR range up to 100FT

LED30Mix 22 pc of Infra-red 850nm ø5 led, 8 pc of Infra-red 850nm ø10 high intensity led, effective IR range 200-260FT

HIGH SPEED PTZ CAMERA AND CONTROLLERS

30C04B / 30C05B / 30C07B / 30C075

Indoor/Outdoor High Speed PTZ Dome Camera, Push Lock Weatherproof Housing, 24VAC

Sony Exview Module EX480 CP
True Day/Night, Mechanical IR Cut,
216X Zoom
(18x Optical & 12x Digital)

Sony SuperHAD CCD
Day/Night 220X Zoom
(22x Optical & 10x Digital)

Sony Exview Module EX1010
True Day/Night, Mechanical IR Cut
432x Zoom
(36x Optical & 12x Digital)

NEW

Sony Exview Module EX1010
True Day/Night,
Mechanical IR Cut
432x Zoom
(36x Optical & 12x Digital)
Auto Tracking Function

540/620TVL High Speed PTZ
752(H)x 582(V) Pixels
Multiple Protocol Incl. Pelco-P & D
128 Presets
360° Endless Pan
Wall or Ceiling Mount Included
AC 24V, 60VA Power Included
Indoor/Outdoor Weather Resistant Housing, IP66

Push Lock Install





30C04A / 30C05A

Indoor/Outdoor High Speed PTZ Dome Camera, Turn Lock Weatherproof Housing, 24VAC

Sony Exview Module EX480 CP
True Day/Night,
Mechanical IR Cut,
216X Zoom
(18x Optical & 12x Digital)

540/620TVL High Speed PTZ
Multiple Protocol Incl. Pelco-P & D
128 Presets
360° Endless Pan
Wall or Ceiling Mount Included
AC 24V, 60VA Power Included
Indoor/Outdoor Weather Resistant Housing, IP66



Turn Lock Install

Sony SuperHAD CCD
Day/Night 220X Zoom
(22x Optical & 10x Digital)

30C060

Indoor/Outdoor Mini PTZ Speed Dome Camera, 10x Optical, Wall Mount or Ceiling Mount, 12VDC

True Day/Night, Mechanical IR Cut

Sony Exview Module
540TVL / 625TVL
100X Zoom (10x Optical & 10x Digital)
Multiple Protocol Incl. Pelco-P & D
Tinted Cover (option)
160 Presets
360° Endless Pan
Indoor/Outdoor Weather Resistant Housing
DC 12V

305300

PTZ Controller Keyboard

Economic Version, Control Up to 16 PTZ Cameras, Control Pan/Tilt Function on Joystick

30C350

PTZ Controller Keyboard

Advanced Version, Control Up to 64 PTZ Cameras, Pan/Tilt/Zoom Function (3D) on Joy Stick

NEW

Control the focus, zoom and iris of the camera / Set Present Position, Call Present Position / Run Cruise Track / Automatic Horizontal Scan Control/ Multi-protocol Including PELCO-D/ PELCO-P / Max. Range: 3500FT

30C541

Outdoor Ceiling Mount
for Speed Dome

30C542

Outdoor Wall Mount
for Speed Dome

30C543

Outdoor Corner Mount
for Speed Dome

COVERT / SPY CAMERA

17610C
Covert PIR Camera
Sony CCD,
480TVL,
3.7mm Pinhole Lens,
12VDC
Non-working Sensor

17602C
Covert PIR Camera
Functional PIR
3.7mm Pinhole Lens
Sony CCD 480TVL
12VDC
Also Available 520TVL

17604C
Covert Wall Clock Camera
Functional Wall Clock
3.7mm Pinhole Lens
12VDC

17606C
Covert Exit Sign Camera
Functional Exit Sign
3.7mm Pinhole Lens
12VDC

Also available in Double Sided Exit Sign Covert Camera (Custom Made)

17607C
Covert Air Purifier Camera
Functional Air Purifier
3.7mm Pinhole Lens
12VDC

17608C
Covert Emergency Light Camera
Functional Emergency Light
3.7mm Pinhole Lens

17616C
Covert Audio Video Snake Camera
3.7mm Pinhole Lens with Audio
6" snake cable length, 12VDC

Audio video recording

Built-in Microphone Amplifier

17617C
Covert Smoke Detector AV Camera
Functional Smoke Detector
3.7mm Pinhole Lens
Built-in Audio
12VDC

Audio video recording

17618C
Covert Door View Camera
1/3" CCD, 1.78mm, 170 degree Wide Angle
Door Thickness Adjustable

17619C
Covert Power Socket AV Camera
Non-Functional Power Socket
3.7mm Pinhole Lens
12VDC

Audio video recording

17620C
Recessed Ceiling Mount Covert Dome Camera
Low Lux 3.7mm Pinhole Lens

1/3 Sony CCD
480TVL, 0.5Lux,
12VDC
Ceiling Mount
Silver or Black
Also Available in 550TVL

17622C
Recessed Wall Mount Covert Dome Camera
Low Lux 3.7mm Pinhole Lens

1/3 Sony CCD
480TVL, 0.5Lux,
12VDC
Wall Mount
Silver or Black
Also Available in 550TVL

17615C
Covert Fire Sprinkler Camera
Non-Functional Sprinkler
3.7mm Pinhole Lens

17618C
Covert Door View Camera
1/3" CCD, 2.2mm, 170 degree Wide Angle
Door Thickness Adjustable

17623C
Indoor, Mirrored Dome Camera 4"

BULLET, MINI, BOARD CAMERA

20C11H

Day/Night Bullet Camera, Indoor/ Outdoor

Sony CCD
Color or Day/Night
480TVL
3.6mm Board Lens
12VDC Black
Weatherproof with roof
Indoor/Outdoor

20C24H

Super Hi-Res Bullet Camera Indoor/ Outdoor

Color or Day/Night
Sony CCD 540TVL
3.6, 6 or 8mm Board Lens
Black or White Case
Waterproof
Indoor/Outdoor
12VDC

21I01C

Color Mini Camera

Sony CCD
480TVL
36x36mm
12VDC

21K11C

Board Lens 3.6mm

Sony CCD
550TVL
30x30mm
12VDC

21I01B

B/W Mini Camera

21I04C

Color Mini Camera , Cone Pinhole Lens 3.7mm

Sony CCD
480TVL
36x36mm
12VDC

21K14C

Sony CCD
550TVL
30x30mm
12VDC

PROFESSIONAL CAMERA, ZOOM CAMERA

10C16C

Professional Style Day/Night CCD Camera

12VDC

Lens not included

10C160

12VDC/24VAC

Back

Color or Day / Night / Sony SuperHAD CCD / Sony DSP/ 480TVL, AWB, AGC, EE/AI, BLC/ Support Auto-Iris Lens / C / CS Mount

109320

License Plate Camera

Lens not included

Side

8-Step Shutter to Match Vehicle's Moving Speed

Color or Day/Night / Sony Exview CCD / Sony HQ1 DSP / 540TVL / 8-Step Slow Shutter adjustment / OSD Menu / BLC, FLC, AGC, LL, AES / Dual Voltage (recommend use 24 VAC)

30C76Z

All-in-one Day/Night 22x Zoom Camera

Back

Day/Night, Sony SuperHAD CCD / Sony DSP/ 22X Optical & 10x Digital Zoom / 540TVL / **OSD Menu / Full Function Settings /** Multiple Protocol including / Pelco-D & Pelco-P etc / Tele/Wide, Near/Far Button Control/ 12VDC

30K79Z

All-in-one Day/Night 36x Zoom Camera

Back

Sony Double Scan Exview HAD CCD / 36x Optical Zoom (10x Digital Zoom) / Wide Dynamic Range / Digital Slow Shutter / Privacy Zone Masking / Pelco D/P Protocol / Support Y/C Output, A/D Control

10C450

Professional WDR Camera, 600/ 700TVL, Dual Power

Lens sold separately



CCTV LENS

Fixed Iris Lens CS Mount

Item	Fixed Iris Lens	Focal Length (mm)	Aperture (F)	Mount	Image Format (inch)	M.O.D. (m)	Angle of View (HOR)°
340016	Fixed Iris Lens	4.0	1:1.6	CS	1/3"	0.1	71
340026	Fixed Iris Lens	6.0	1:1.6	CS	1/3"	0.1	40
340036	Fixed Iris Lens	8.0	1:1.6	CS	1/3"	0.1	34.2
340056	Wide Angle Fixed Iris Lens	2.5	1:1.6	CS	1/3"	0.2	90
340066	Fixed Iris Lens	12	1:1.8	CS	1/3"	0.1	22
340076	Fixed Iris Lens	16	1:1.6	CS	1/3"	0.1	16.4
34MP06	Wide Angle IR MP Lens	2.8	1:1:2.0	CS	1/3"	0.15	104
34MP16	IR Mega-Pixel Lens	3.6	1:1.8	CS	1/3"	0.2	77
34MP26	IR Mega-Pixel Lens	6.0	1:1.8	CS	1/3"	0.2	48
34MP36	IR Mega-Pixel Lens	8.0	1:1.8	CS	1/3"	0.2	35.5
34MP66	IR Mega-Pixel Lens	12	1:1.8	CS	1/3"	0.2	22.7
34MP76	IR Mega-Pixel Lens	16	1:1.8	CS	1/3"	0.2	16.4

Vari-Focal Manual Iris Lens, CS Mount

Item	Manual Iris Vari-Focal Lens	Focal Length (mm)	Aperture (F)	Mount	Image Format (inch)	M.O.D. (m)	Angle of View (HOR)°
350006	Manual Iris Vari-Focal Lens	3.5 - 8.0	1:1.4	CS	1/3"	0.1	78 - 34
350016	Manual Iris Vari-Focal Lens	6.0 - 15	1:1.4	CS	1/3"	0.1	46 - 19
350026	Manual Iris Vari-Focal Lens	2.8 - 12	1:1.4	CS	1/3"	0.1	85 - 27
350036	Manual Iris Vari-Focal Lens	6.0 - 60	1:1.6	CS	1/3"	0.2	41.4 - 4.8
350066	Long Range MIVF Lens	5.0 - 100	1:1.8	CS	1/3"	0.2	45 - 2.9
35MP26	IR Mega-Pixel MIVF Lens	12 - 30	1:1.6	CS	1/3"	0.1	23 - 9.9
35MP06	IR Mega-Pixel MIVF Lens	3.5 - 8.0	1:1.4	CS	1/3"	0.2	78 - 34
35MP16	IR Mega-Pixel MIVF Lens	4.5 - 10	1:1.6	CS	1/3"	0.1	77.6-37.12
35MP36	IR Mega-Pixel MIVF Lens	5.0 - 50	1:1.6	CS	1/3"	0.1	49-5.6

Vari-Focal Auto Iris Lens (DC Drive)

Item	Auto Iris Vari-Focal Lens	Focal Length (mm)	Aperture (F)	Mount	Image Format (inch)	M.O.D. (m)	Angle of View (HOR)°
360006	Auto Iris Vari-Focal Lens	3.5 - 8.0	1:1.4	CS	1/3"	0.1	78 - 34
360016	Auto Iris Vari-Focal Lens	6.0 - 15	1:1.4	CS	1/3"	0.1	46 - 19
360036	Auto Iris Vari-Focal Lens	2.8 - 12	1:1.4	CS	1/3"	0.1	85 - 27
360046	Auto Iris Vari-Focal Lens	6.0 - 60	1:1.6	CS	1/3"	0.2	41.4 - 4.8
360056	Long Range AIVF Lens	5.0 - 100	1:1.8	CS	1/3"	0.2	45 - 2.9
36IR06	IR AIVF Lens	3.0 - 8.0	1:1.0	CS	1/3"	0.1	88 - 34
36IR26	IR AIVF Lens	12 - 30	1:1.6	CS	1/3"	0.2	23-9.9
36IR36	IR AIVF Lens	2.8 - 12	1:1.4	CS	1/3"	0.1	94 - 25
36IR46	IR AIVF Lens	5.0 - 50	1:1.6	CS	1/3"	0.1	49-5.6

CCTV LENS, CON'T

Mini Lens, Board Mount

Item	Board Lens	Focal Length (mm)	Aperture (F)	Mount	Image Format (inch)	M.O.D (m)	Angle of View (HOR)°
370086	Fish Eye Lens	1.7		12*0.5	1/3"	0.2	127
370056	Wide Angle Lens	2.5	1:2.0	12*0.5	1/3"	0.2	108
370006	Mini Lens	3.6	1:2.0	12*0.5	1/3"	0.2	73
371007	Mini Cone Pinhole Lens	3.7		12*0.5	1/3"	0.2	
371017	Mini Flat Pinhole Lens	3.7		12*0.5	1/3"	0.2	
370026	Mini Lens	6.0	1:2.0	12*0.5	1/3"	0.2	54
370036	Mini Lens	8.0	1:2.0	12*0.5	1/3"	0.2	43
370066	Mini Lens	12	1:2.0	12*0.5	1/3"	0.2	29
370076	Mini Lens	16	1:2.0	12*0.5	1/3"	0.2	21
370096	Mini Lens	25	1:2.0	12*0.5	1/3"	0.2	14
37MP06	Wide Angle IR MP Mini Lens	2.5	1:1.6	12*0.5	1/3"	0.2	107.1
37MP16	IR Mega-Pixel Mini Lens	3.6	1:1.8	12*0.5	1/3"	0.2	77
37MP37	IR Mega-Pixel Mini Pinhole Lens	3.7	1:1.8	12*0.5	1/3"	0.2	83.2
37MP46	IR Mega-Pixel Mini Lens	4.2	1:1.8	12*0.5	1/3"	0.2	71.2
37MP56	IR Mega-Pixel Mini Lens	6.0	1:1.8	12*0.5	1/3"	0.2	48
37MP66	IR Mega-Pixel Mini Lens	8.0	1:1.8	12*0.5	1/3"	0.2	35.52
37MP76	IR Mega-Pixel Mini Lens	12	1:1.8	12*0.5	1/3"	0.2	22.72
37MP86	IR Mega-Pixel Mini Lens	16	1:1.8	12*0.5	1/3"	0.2	16.4

Mini Lens, Auto Iris Vari-Focal, Board Mount

Item	Board Lens, Auto Iris Vari-Focal	Focal Length (mm)	Aperture (F)	Mount	Image Format (inch)	M.O.D. (m)	Angle of View (HOR)°
380409	Auto-Iris Vari-Focal Board Lens	4 - 9	1:1.6	12*0.5	1/3"	0.1	82 - 30
380922	Auto-Iris Vari-Focal Board Lens	9 - 22	1:1.6	12*0.5	1/3"	0.1	31 - 14
382509	Auto-Iris Vari-Focal Board Lens	2.5 - 9	1:1.6	12*0.5	1/3"	0.1	
382606	Auto-Iris Vari-Focal Board Lens	2.6 - 6	1:1.6	12*0.5	1/3"	0.1	
383508	Auto-Iris Vari-Focal Board Lens	3.5 - 8.0	1:1.6	12*0.5	1/3"	0.1	69 - 33.84

Mini Lens, Manual Iris Vari-Focal, Board Mount

Item	Board Lens, Manual Iris Vari-Focal	Focal Length (mm)	Aperture (F)	Mount	Image Format (inch)	M.O.D. (m)	Angle of View (HOR)°
393508	Manual Iris Vari-Focal Board Lens	3.5 - 8.0	1:1.6	12*0.5	1/3"	0.1	69 - 33.84

WANT QUALITY PRODUCTS, LOOKING FOR SPECIAL PRODUCTS NOT ON THIS CATALOG,
CALL US TODAY 1-866-58-CCTV1
WE PROVIDE FAST AND FRIENDLY SERVICE WITH GREAT TECHNICAL SUPPORT

Connectors

95700T
BNC Twist-on for RG-59

957002
BNC Crimp-on for RG-59

957310
BNC T Connector F-F-F

957110
BNC T Connector

957330
BNC L Twist-on connector

957020
BNC Male to RCA Female

957030
BNC Female to RCA Male

957050
RCA Male to RCA Male

957140
BNC Male to RCA Male

957040
RCA Female to RCA Female (RCA Coupler)

957120
BNC Male to BNC Male

957080
BNC Female to BNC Female (BNC Coupler)

957070
RCA Female to 3.5mm Plug (Mono Audio In)

957060
RCA Plug to 3.5mm Jack (Mono Audio Out)

957130
2 RCA male to 3.5mm Jack (Stereo Audio Out)

957170
BNC Twist-on for RG-6

957300
BNC Crimp-on for RG-6

957320
BNC L Twist-on for RG-6

957420
Screw Type Wire Connector
100pc/pk

957410
B-Type Wire Connector
500pc/pk

957190
F-type Male to BNC Twist-on

957150
F-type Female to BNC Male

957090
F-type Male to RCA Female

957100
F-Female to RCA Male

957180
F-type Male to BNC Female

957200
F-type Male to BNC Male

957220
F-type Screw-on Adapter (F-type Male to Female)

957230
F-type Snap-on Adapter (F-type Male to Female)

957240
F-type Female Coupler

957250
F-type Male Coupler

957550
Compression Type BNC Male Crimp-on for RG-59

957551
Compression Type BNC Female Crimp-on for RG-59

957552
Compression Type RCA Male Crimp-on for RG-59

957553
Compression Type RCA Female Crimp-on for RG-59

A09098
Cable Tie 8", 20pc/ bag



957560
Compression Type BNC Male Crimp-on for RG-6

957561
Compression Type BNC Female Crimp-on for RG-6

957562
Compression Type RCA Male Crimp-on for RG-6

957563
Compression Type RCA Female Crimp-on for RG-6

957010
RJ45 8P8C Modular Plug

957554
Compression Type F-Male Crimp-on for RG-59

957555
Compression Type F-Female Crimp-on for RG-59

957564
Compression Type F-type Male Crimp-on for RG-6

957565
Compression Type F-type Female Crimp-on for RG-6

957280
RJ45 Keystone Jack, Unshielded, Blue

685000
Outdoor Housing

Flip Open & Lock



68500H
Housing w/ Built-in Heater and Blower



685040
Outdoor Housing

Side Open & Lock

685020
Mini Outdoor Housing

Flip Open & Lock

68502H
Mini Outdoor Housing Heater & Blower Built-in

675030
Matching Bracket

675000
Wall Mount Bracket



Matching Housing:
685000, 68500H, 685040

675020
Ceiling Drop Bracket

L Shape
Max Load: 10Kg

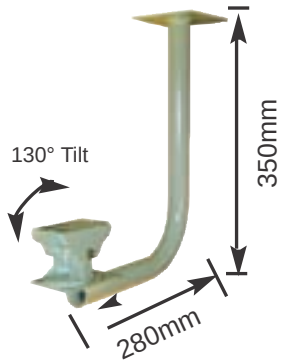

685050
Outdoor Housing w/ Cable Management

Side Open & Screw



68505H
Outdoor Housing Heater and Blower w/Cable Management

685070
Outdoor Camera Housing Nylon+Fiber Glass, Cable Management

Side Open

68507H
Outdoor Camera Housing with Heater & Blower, Nylon+Fiber Glass, Cable Management



685030
Ceiling Housing



Ceiling Recess Mount

675050
Housing Bracket Cable Management



675040
J Style Wall Mount Bracket Cable Management

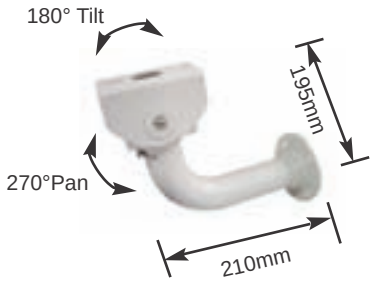

Matching Housing:
685050, 68505H, 685070, 68507H

685060
Ceiling Housing Dome Style for Box Camera

Fit any Box Style Camera

OUTDOOR HOUSING & BRACKET

CAMERA BRACKET, DUMMY DOME

665000
Camera Bracket



Metal, Beige,
Max. Load: 1.5 kg

66500T
Camera Bracket Ceiling T Bar

Metal, Beige,
Max. Load: 1 kg

665050
Camera Bracket Ceiling Mount

Metal,
Silver or Black,
Max. Load: 1.5 kg

665130
Camera Bracket



Metal, Silver,
Max. Load: 1.5 kg

665010
ABS Camera Mount



Plastic, Beige,
Max. Load: 1.5 kg

665160
Camera Bracket

Metal, Silver,
Max. Load: 1 kg

665140
Heavy Duty Camera Bracket



Metal, Silver,
Max. Load: 5 kg

665170
Heavy Duty Camera Bracket w/Cable Management

Metal, Silver,
Max. Load: 2 kg

CC5130
3" Dummy Dome with Corner Mount



66502L
Ceiling Drop L Type Camera Bracket w/ Cable Management

Metal, Silver,
Max. Load: 2 kg

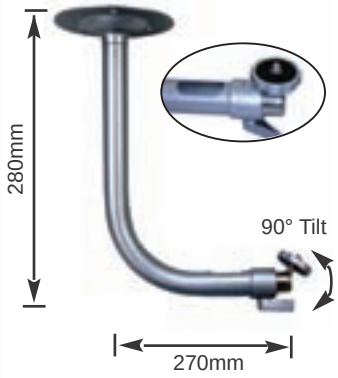

FOR BOX OR BULLET CAMERA

665070
Ceiling Drop Camera Bracket w/ Cable Management

Metal, Silver
Max. Load: 2 kg

FOR BOX OR BULLET CAMERA

665080
Ceiling Drop Cable Thru Camera Bracket

Metal, Silver
Max. Load: 2 kg

CC5100 CC510W
4" Dummy Dome Black or White

INDOOR

CC502W
3" Dummy Dome White

Indoor

CC5180
4" Mirror Cover Dummy Dome, Black or White Base

Indoor

CC5160
Heavy Duty Vandal Dome Housing, Ceiling mount

Beige

Outdoor Weatherproof

CC5140
Heavy Duty Vandal Dome Housing with L Type Wall Mount Bracket

Beige

Outdoor Weatherproof

Note: 1mm = 0.04 inch

POWER ADAPTER AND POWER SUPPLY BOX

70502L **705050**

12VDC Power Transformer

500mA 1500mA

Slim Design

705030

Power Transformer

12VDC 1250mA

705055 **705060**

12VDC Power Transformer

3.5Amp 5Amp

935060

Power Cord, 3-Prong, 4FT

715000

24VAC, 20VA, 833mA

Power Transformer

715030

24VAC, 40VA, 1.67Amp

Power Transformer

715050

24VAC, 60VA, 2.5Amp

Power Transformer

91R06D

9 Ch. Power Supply Box

DC 12V, 5A

91R09D

9 Ch. Power Supply Box

DC 12V, 10A

Adjust Voltage +/- 1.5 Volt

Quite Heat Sink Style

Individually Fused LED Indicators

91R125

18 Ch. Power Supply Box

DC 12V, 12.5A, Max 14A

Heavy Duty

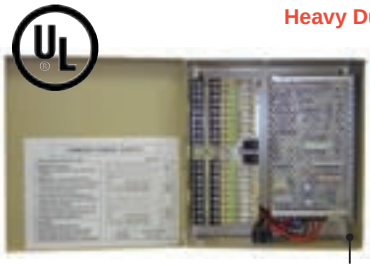

Adjust Voltage +/- 1.5 Volt

Quite Heat Sink Style

Individually Fused LED Indicators

910910

24VAC PTC Fuse Power Supply Box, 9CH, 10Amp

Fuseless

911810

24VAC PTC Fuse Power Supply Box, 18CH, 10Amp

Fuseless

04UP08 **04UP15**

Uninterrupted Power Supply

800VA 1500VA

POWER SOLUTIONS

935220
4 Ch. Power Splitter Cable

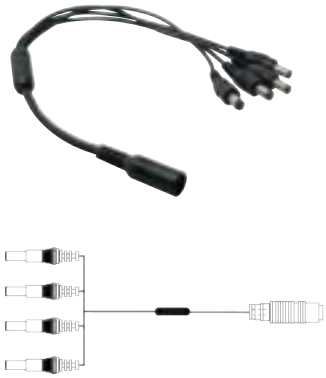

935120
4 Ch. Power Splitter Cable

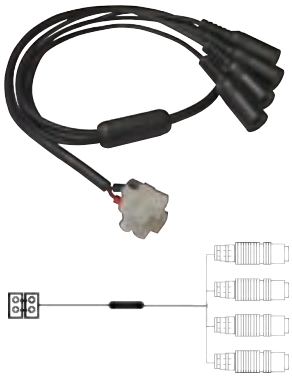

935000
DC Female Flying Leads

DC Cord with Plug (2.1* 5.5 mm) and screw terminal

935130
DC Male Flying Leads

DC Cord with Jack (2.1* 5.5 mm) and screw terminal

949GD0
Ground Loop Isolator

Application: Illustration on 4 Ch. Power Splitter Solutions

1. To Split & Supply DC12V, 1.5A, 3.5A or 5Amp power into 4x DC Cameras via Pre-made Cables

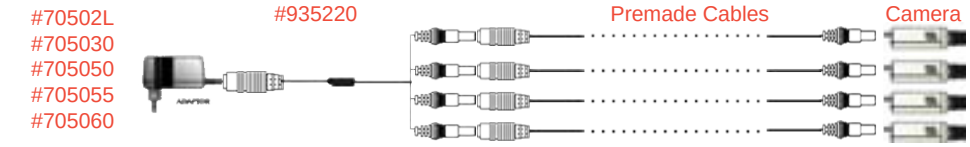

2. To Split & Supply 24VAC, 20VA(833mA), 40VA (1.67A) power into 4x AC Cameras via Pre-made Cables

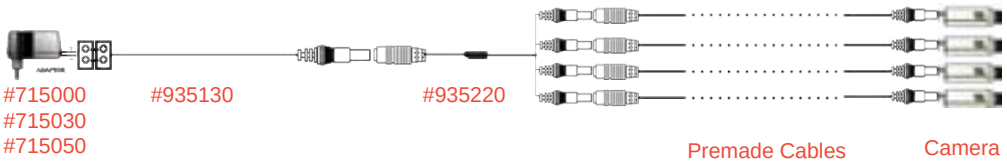

3. To Split & Supply 24VAC, 20VA(833mA), 40VA (1.67A) power into 4x AC Cameras via Siamese Cable or 18/2 AWG Power Cables (Pigtails)

4. To Split & Supply DC12V, 1.5A, 3.5A or 5Amp power into 4x DC Cameras via Siamese Cable or 18/2 AWG Power Cable (Pigtails)

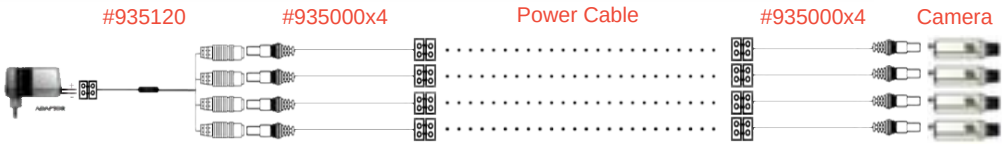

Application: Illustration on 24VAC -> 12VDC Power Inverter

To install 12VDC Camera (upto 1.5Amp) on a long run cable via 24VAC power

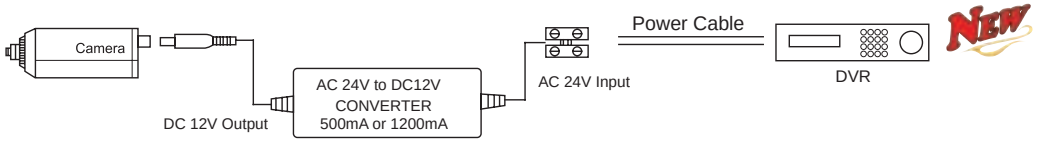

935190
6-Outlet Power Strip
Vertically Aligned,
6 Grounded Power Outlets
Space Saver



15A circuit breaker
14AWG x3 heavy duty cord

935090
Fuse for Power Supply Boxes 1 Amp

935092
2 Amp

935095
5 Amp

935020
Power Converter For 12VDC IR Cameras
High Power



Input: 24VAC
Output: 12VDC. 1200mA

CABLES FOR CCTV

We stock industrial grade cables for video surveillance and IP Networking needs. Our cables contain 99.95% "new" copper for the best signal transmission, thus gurantee the most efficient camera installations. These cables features sequential markers and are certified by UL.

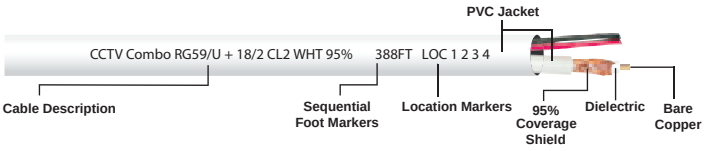

Easy Pull Package 500FT

Wood Spingle Package 500FT, 1000FT

RG59 Siamese Cable, Zip Style

Description	Model Number	Size	Length	Color	Shield
RG59/18-2	93C06W	RG59/20 A WG, Power/18 AWG	500 Feet	WHT	95% Coverage
RG59/18-2	93C06B	RG59/20 A WG, Power/18 AWG	500 Feet	BLK	95% Coverage
RG59/18-2	93C16W	RG59/20 A WG, Power/18 AWG	1000Feet	WHT	95% Coverage
RG59/18-2	93C16B	RG59/20 A WG, Power/18 AWG	1000Feet	BLK	95% Coverage

RG59 Siamese Cable, Combo Style

Description	Model Number	Size	Length	Color	Shield
RG59/18-2	93C08W	RG59/20 AWG, Power/18 AWG	500 Feet	WHT	95% Coverage
RG59/18-2	93C08B	RG59/20 AWG, Power/18 AWG	500 Feet	BLK	95% Coverage
RG59/18-2	93C18W	RG59/20 AWG, Power/18 AWG	1000 Feet	WHT	95% Coverage
RG59/18-2	93C18B	RG59/20 AWG, Power/18 AWG	1000 Feet	BLK	95% Coverage

935995

RG59 Coaxial, 1000ft

95% Copper Braid

80% Copper Braid

Foot Marking

937R60

RG-6 Coaxial Cable 1000ft

60% Copper Braid

Foot Marking

92T060-92T150

Pre-made Video & Power Cable

Available in 60FT & 150FT

BNC with Power Combo Cable

93F182

Power Cable, 18AWG/2, 1000ft

93F222

Power Cable, 22/2AWG

928600

DIY CABLE, Video, Audio, Power, 60ft

97C5PV **97C5SH**

Cat-5E Network Cable, 1000ft

UTP (Unshielded)

STP (Shielded)

Cat-5E 350Mhz
1000ft. Bulk
Solid Wire
Grey or White
Easy Pull Box

93F224

Alarm Cable, 22/4AWG, **1000ft**

VIDEO BALUN

I. Passive Video Balun: Transmit Video over Cat5E Cable, upto 1000FT

Camera, TX Side — Monitor/DVR RX Side

94J010

BNC Male to RJ45 Screw In Single Channel Both TX/RX Side

Camera → **CAT5E** → Monitor

Transmit Video Upto 1000FT(Color), 2000FT(BW)

94J020

Cable Type BNC Male to RJ45 Push-In, Single Channel Both TX/RX Side

Camera → **CAT5E** → Monitor

Transmit Video Upto 1000FT(Color), 2000FT(BW)

94J040 Quad Balun

NEW

BNC Female (4) to RJ4

Terminal Block (8) 4 Channel Both TX/RX Side

Camera, Camera, Camera, Camera → **CAT5E** → Monitor

Transmit Video Upto 1000FT(Color), 2000FT(BW)

Camera → **CAT5E** → Monitor

x16

Any Passive or Active Single, Quad Balun up to 16 channels

Transmit Video Upto 1000FT(Color), 2000FT(BW)

94708P

1U Rack Mountable BNC Female (6) to Terminal Block (8) 8CH RX

Rack Mount

94716P

1U Rack Mountable BNC Female (16) to Terminal Block (16) 16CH RX

II. Passive Video Balun with Power: Transmit Audio / Video / Power over Cat5E, upto 2000FT

94J01P

Passive Video Balun with Power BNC Female to RJ45 Socket or Screw -in Both TX/RX Side

NEW

Camera, TX Side

Camera →

Balun w/Power

Audio

Power

Video: CAT5E

Power: CAT5E

Monitor/DVR, RX Side

Monitor

Video (BNC or Screw-On)

III. Active Video Balun: Transmit Video over Cat5E Cable, upto 6000FT

Long Distance

947PAC

BNC Male to RJ45 Push-in type, comes with 12V DC power supply TX Side

Camera, TX Side

Camera →

CAT5E

Transmit Video 1000FT~4000FT~ 6000FT

Monitor/DVR, RX Side

Monitor

947PAM

BNC male to RJ45 push-in type, 12V DC power supply Included, RX Side

Camera → **CAT5E** → Monitor

x16

Any Passive or Active Single, Quad Balun up to 16 channels

Transmit Video From 1000FT ~ 3000FT

94908A

8CH Active Video Balun

94916A

16CH Active Video Balun

Brightness & Contrast Adj on each channel BNC to Terminal Block 1U Rackmountable RX Side

VIDEO PROCESSOR

D1xxxE

SVGA Extension Cable, HD15, Male to Female, 2 Ferrules, blk

Available in
6 / 15 / 25 / 50 / 75 / 100 ft

D1xxxV

SVGA Cable, HD15 pin, Male to Male, 2 Ferrules

Available in
6 / 15 / 25 / 50 / 75 / 100 ft

D1303D

HDMI Cable Gold Plated, Male to Male, 1080p

Available in
3 / 6 / 10 / 15 ft

46C00C

Color Quad Processor with Remote

front

back

46C00B

B/W Quad

D07020

2 Port Video Duplicator

SVGA, VGA, XGA, QXGA and Multi-Sync
Video Resolution 2046x1536, 450mHz
Transmission distance: 180 ft.
Can be daisy chained

D07040
4 Port

D07080
8 Port

D29100

HDMI 4x2 Matrix (4-in, 2-Out)

front

back

D27100 D27180

1-in-4-Out Audio Video Splitter
1-In-8-Out Audio Video Splitter

front

back

D27150

RCA 1 in 7 Out Video Distribution with Gain Control



D29120 D29140

HDMI (2-Way, 4-Way) Splitters

front

back

D30AD3

Composite RCA, S-Video and VGA to VGA Converter (Wide Screen Support)

VGA Loop Thru

Display Video image on PC Monitor

D30DA1

VGA to Composite RCA, S-Video and VGA Converter

VGA Loop Thru

Display PC image on TV

D29110

Video to HDMI AV Converter switcher with Remote

front

back

MG-CAPIT

MyGica Capit USB Video Capture

Capture AV and S-Video up to 720*576. record screened images to HDD in MPEG format.

D12030

VGA Video Extender over CAT5/CAT6 upto 300FT

D12040

HDMI Video Extender over CAT5/CAT6 133FT/1080p 200FT/1080i

INSTALLATION TOOLS

A09160
3.5" LCD Multi-Function CCTV Video Tester

NEW

- Lithium Battery with charger included
- Can provide power input to camera

A09260
2.5" LCD Multi-Function CCTV and Network Cable Tester

NEW

- Video Test:
- PTZ Control Test
- UTP Cable Network Test
- Video Signal generator
- RS485, RS232 data test

A09050
Cable Tester

Tests 10 Base-T cable (Category 5), 10 Base-2 cable (Coax), RJ45/RJ11 modular cables etc. verify the cable continuity, open, short and cross-connect.

A07000
Professional Coaxial Crimping Tool

For RG58,59,62,6 Cables

A07030
9" Insulated Terminal Crimping Tool

For B-Wire Connector

A07041
7.6" Professional Compression Tool - Adjustable & Changeable for Waterproof Connectors

NEW

For crimping compression RG59, RG6 (4C, 5C), F, BNC, RCA Connector

A07020
Professional RJ45 All-in-one Tool

Cutting/ Stripping / Crimping
For CAT-5/RJ-45 Modular Plug

A07010
Professional Coaxial Stripping Tool

NEW

For RG58, RG59, RG62, RG6 Cables

A07042
Professional Compression Tool, adjustable for waterproof connectors

NEW

For crimping compression: RG59, RG6, RG11
* Connector type: BNC, RCA, F Connector

AGF306
Glow-fish - Wire Installation Rod

3/16" Diameter Bullnose / Female
Glow in the darkness



AGF310
Glow-fish - Wire Installation Rod

3/16" Diameter Male / Female
Glow in the darkness



AFIB201
Fiber-fish or Glow-fish Replacement Tips, 2pc per Pkg

For 3/16" Diameter Rods

APC206
Fiber-fish - Wire Installation Rod

3/16" Diameter Bullnose / Female
Orange

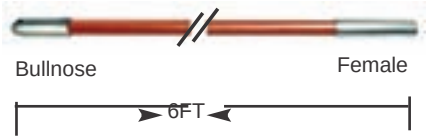

APCF210
Fiber-fish - Wire Installation Rod

3/16" Diameter Male / Female
Orange



967040
Indoor/Outdoor Surveillance Signage, Maxiplate™

NEW

Size 11.5" x 11.5", white Maxiplate, hole punched

WIRELESS DEVICES, IR ILLUMINATOR, DVR LOCKBOX

64558R

5.8GHz 8CH / 16CH Wireless AV Receiver

Encoded video for secure receiving
Omni directional dipole antenna 3dBi
8 or 16 ID address selectable
Alarm output for siren or flashing
Audio Output
Video Output
DC 12V / 750mA

64558T

5.8GHz 8CH Wireless AV Transmitter, Upto 360FT

64558T-1W

5.8GHz 16CH Wireless AV Transmitter Output Power: 1W, Upto 2500FT (Export Only)

Encoded video for secure transmission
Omni directional dipole antenna 5dBi
Build-in alarm buzzer
16 ID address selectable
Audio Output
Video Output
DC 12V / 750mA

To connect to any Security Cameras) and Transmit / Record Audio/Video Wirelessly!

64C05R

Indoor 2.4GHz 4CH Wireless AV Receiver

64C05T

Indoor 2.4GHz 4CH Wireless AV Transmitter

64C24A / 64558A

Outdoor Hi-Gain Directional Antenna

2.4Ghz **5.8GHz**

Hi-Gain: 16dBi~20dBi
Water Proof: IP68
Connector: N type female
Polarization: Vertical
Mounting Bracket Included
Can be connected to Wireless Camera, TX and RX

64C24W / 64558W

Wireless Extension Cable for N type TX, RX or Camera

SMA male to N male
Frequency Range: 0 ~ 6.0Ghz
Approx..... Length 9FT-15FT

155IR5

Outdoor IR Illuminator, 165FT IR Distance, 60 LED, DC 12V, 400mA

925020

Audio Cable with Built-in Microphone Amplifier

3FT Audio Patch Cable, Pickup Audio within 10FT

155IR6

Outdoor IR Illuminator, 333FT IR Distance, 12 Large LED, DC 12V, 700mA

04CS04

4U, 21"L x 21"W x 8"H

04CS05

3U, 18"L x 18" W x 5.5" H

04CS06

4U Deep, 21" W x 24" L x 8" H

DVR Lockbox

- DVR Lockbox with cooling fan
- Strong 16 gauge steel
- Removable Lid
- Lockable Front Door with 2 Lock Keys
- Superior Cooling System
- Durable textured powdercoat finish

UNIVERSAL FLAT TV MOUNT

LCD-401AB
LCD Wall Mount

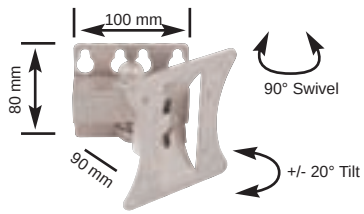

VESA: 50/75/100/200/200x100mm
LOAD: 66 Lbs
Screen Size: 10-32”

10”~32”

LCD-403AB
LCD Wall Mount

10”~32”

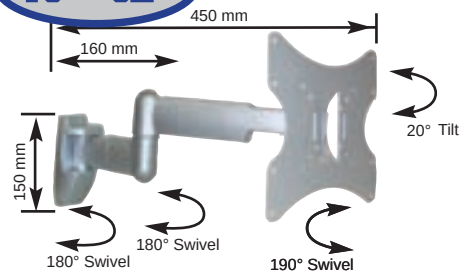

VESA: 50/75/100/200/200x100mm
LOAD: 66 Lbs
Screen Size: 10-32”

LCD-T6
LCD Table Stand Mount

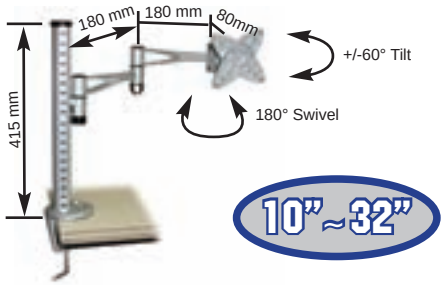

10”~32”

VESA: 75x75/100x100mm
LOAD: 66 Lbs
Screen Size: 10-30”

LCD-T9
Dual Monitor Desk Mount

NEW

13”~23”

VESA:75x75,100x100
Max. Arm Reach:440mm
Max Load: 33 Lbs x2
Tilt: ±60° up and down
Swivel: 360°
Rotate: 360° landscape to portrait rotate
Screen Size: 13”~23”(ea)

LCD-504A
LCD Ceiling Mount



10”~32”



VESA: 50/75/100/200mm
LOAD: 66 Lbs
Screen Size:10~32”

LCD-PLB-CE348
Universal LCD Ceiling Mount

37”~63”

NEW

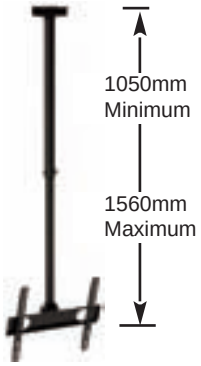

TV Mount Size: Min 2”x2”
Max 31.5”x15.75”
Max Load: 110Lbs
Screen Size: 37”~63”
Tilt: Down 15°, Up 0°
Swival: 360°

LWLF-102M
Universal Fixed Wall LCD Bracket

32”~50”

Screen Size: 32”~50”
Max Load: 100lbs
VESA: Max 650 x 400mm
TV to wall: 28mm
Tilt: Fixed
Swivel: Fixed

LWLT-102M
Universal Tilt Wall LCD Bracket

NEW

Screen Size: 32” ~ 50”
Tilt: 5° up ~ +15° down
Max Load Capacity: 100lbs
VESA: Max 600 x 400mm
TV to wall: 60mm

LWLF-102L
Universal Fixed Wall LCD Bracket

NEW

Screen Size: 36”~63”
Max Load: 165lbs
VESA: Max 800 x 400mm
TV to wall: 28mm
Tilt: Fixed
Swivel: Fixed

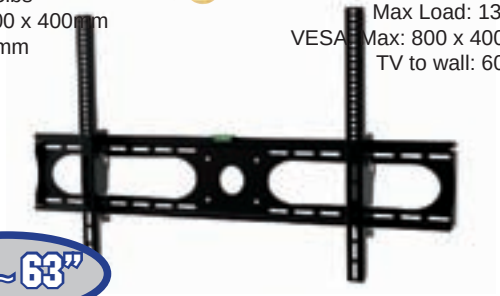

36”~63”

LWLT-102L
Universal Tilt Wall LCD Bracket

Screen Size: 36~63”
Tilt: 5° up ~ +15° down
Max Load: 132lbs
VESA Max: 800 x 400mm
TV to wall: 60mm

LCD-PA924

Width: Min 45, Max 420mm
Height: Min 50mm, Max 237mm
TV to Wall: Min 95mm, Max 575mm
Max Vesa: 400 x 200
Screen: 23" ~37"
Load: 88 Lb

23”~37”

LCD-PA948

Width: Min 45, Max 820mm
Height: Min 58mm, Max 410mm
TV to Wall: Min 95mm, Max 575mm
Max Vesa: 400 x 200
Screen: 32" - 63"
Load: 132 Lb

32”~63”

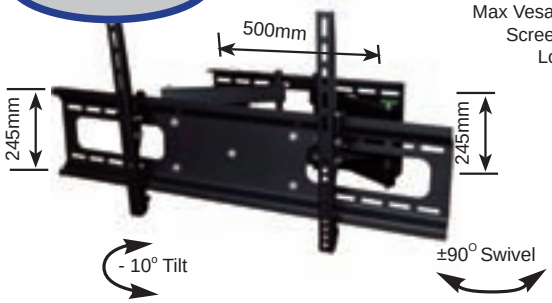

*** 1lbs = 0.454Kg, 1 inch = 25.4mm ***

SURVEILLANCE DIY PACKAGES

4CH ALL-IN-ONE PACKAGE

ES034422

eSecure DIY Retail Package, 4CH H.264 DVR with 2x Indoor IR Dome Camera, 2x60FT Cable and Power Adapters, optional HDD up to 2TB

ES034443

eSecure DIY Retail Package, 4 CH H.264 DVR w/ 4x 12 Led IR Bullet Cameras, 4x60FT Cable and Power Adapters, optional HDD up to 2TB

ES034441

eSecure DIY Retail Package, 4 CH H.264 DVR w/ 4x 26 IR Bullet Cameras, 4x60FT Cables and Power Adapters, optional HDD up to 2TB

ES03444A

eSecure DIY Retail Package, 4 CH H.264 DVR w/ 4x CCD 26 IR Bullet Cameras, 4x60FT Cables and Power Adapters, optional HDD up to 2TB

ES034444

eSecure DIY Retail Package, 4 CH H.264 DVR w/ 4x Camera (2x IR Bullet and 2x Indoor IR Dome), 4x60FT Cable and Power Adapters, optional HDD up to 2TB

8CH ALL-IN-ONE PACKAGE

ES038546

eSecure 8 Channel H.264 Surveillance System + 4 Day & Night 600TVL Camera Kit , 4x60FT Premade Cable and Power, optional HDD up to 2TB

ES038541

eSecure DIY Retail Package, 8 CH H.264 DVR w/ 4x 26 IR Bullet Cameras, 4x60FT Cables and Power Adapters, optional HDD up to 2TB

ES03854A

eSecure DIY Retail Package, 8 CH H.264 DVR w/ 4x CCD 26 IR Bullet Cameras, 4x60FT Cables and Power Adapters, optional HDD up to 2TB

SURVEILLANCE DIY PACKAGES (CON'T)

8CH ALL-IN-ONE PACKAGE

ES038565

eSecure 8 Channel H.264 Surveillance System + 6 Day & Night Camera Kit (4xIndoor Dome + 2xOutdoor Bullet) , 6x60FT Pre-made Cable and Power, optional HDD up to 2TB

ES038567

eSecure 8 Channel H.264 Surveillance System + 6 Day & Night Camera Kit (2xIndoor Dome + 4xOutdoor Bullet) , 6x60FT Pre-made Cable and Power, optional HDD up to 2TB

ES038581

eSecure DIY Retail Package, 8 CH H.264 DVR, 8x 26 IR Bullet Cameras, 8x60FT Cables and Power Adapters, optional HDD up to 2TB

ES03858A

eSecure DIY Retail Package, 8 CH H.264 DVR, 8x CCD 26 IR Bullet Cameras, 8x60FT Cables and Power Adapters, optional HDD up to 2TB

16CH ALL-IN-ONE PACKAGE

ES036381

eSecure DIY Retail Package, 16 CH H.264 DVR w/ 8x 26 led IR Bullet Cameras, 8x60FT Cables and Power Adapters, optional HDD up to 2TB

CAMERA DIY KIT

ESQ15114 **ESQ15A14**

eSecure 4-Pak Indoor/Outdoor 26 Led IR Bullet Camera DIY Kit

ESQ16112

eSecure 2-Pak Indoor Eyeball 12 IR Dome Camera Kit

ESQ23111

eSecure Indoor Dome Camera 1-Pack DIY Kit

PROFESSIONAL SURVEILLANCE PACKAGES

03M1404TC

4 CH H.264 DVR with 4 Sony CCD Vandal IR Dome Camera (or choose any of the camera from below list), 540TVL, 4x60FT Cable and Power Adapters, optional HDD upto 2TB

03M1808TC

eSecure DVR DIY Package, 8 CH H.264 DVR + 8 Sony CCD Vandal IR Dome Camera 540TVL w/up to 60FT Night Vision + 8 60FT Cables + Power Adapters + 500GB HDD Installed

0374808SB

Package Contains:
- 1 x 8CH H.264 DVR with 500G HDD, 15 Days Recording
- VGA, PTZ, Audio, CD, User Manual Included
- 8 x Sony CCD/DSP Cameras, 540TVL, 12VDC*
- 1 x 9CH Power Supply Box, 5Amp, DC
- 8 x Pre-made Cable or 500FT Spool Siamese, Video & Power
- 1 Year Warranty

0372608SB

16CH DVR W/ 8 CAMERA DVR PACKAGE:

Package Contains:
- 1 x 16CH H.264 DVR with 500G HDD
- VGA, PTZ, Alarm, User Manual Included
- 8 x Sony CCD/DSP Cameras, 540TVL, 12VDC*
- 1 x 9CH Power Supply Box, 10Amp
- 1 x 500FT Siamese Cable (Black or White)
- 1 Year Warranty

0372616SB

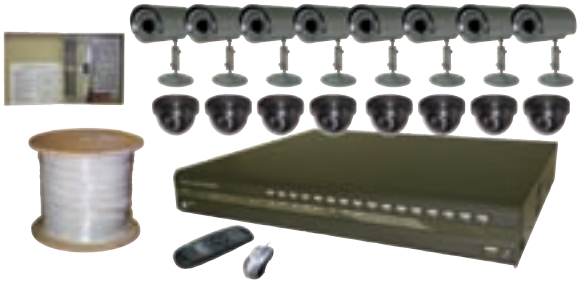

16 CAMERA DVR COMPLETE PACKAGE:

Package Contains:
- 1 x 16CH H.264 DVR with 1000G HDD,
- VGA, PTZ, Alarm, User Manual Included
- 16 x Sony CCD & DSP Cameras, 540TVL, 12VDC
- 1 x 18CH Power Supply Box, 14Amp, DC
- 1 x 1000FT Spool Siamese Cable (White)
- 1 Year Warranty

Cameras you can choose in these packages:

CCTV One

Tel : (323)721-8999
Fax: (323)721-8599
http://www.cctvone.com
info@cctvone.com

WWW.CCTVONE.COM

BEST HOME SECURITY SYSTEMS

Professional CCTV

DIY Surveillance Package

IP Solution

PC Video Solution

CCTVONE
5608 E. Washington Blvd
Commerce, CA 90040

PRESORTED STD
U.S. POSTAGE
PAID
MONTEREY PARK
CA
PERMIT NO. 70